




RT1 Aluminum Ribbon Tweeter


Impedance: 6ohms
Rated Power: 30W
Sensitivity: 91dB/W/m
Frequency range: 1700Hz-30 kHz
Dimension of ribbon (mm): 8.5W×60L×0.015T
Shape of ribbon: Non-corrugated honeycomb
Mass of ribbon: 16mg
Moving area of ribbon: 510 square millimeter
Gap flux: 0.55Tesla
Recommended crossover frequency: 2500Hz
Material of faceplate: aluminum
Dimension of faceplate (mm): 125mm×4T
Outside dimension (mm): 125mm X 125mm ×84D
Net weight: 0.98kg/pc

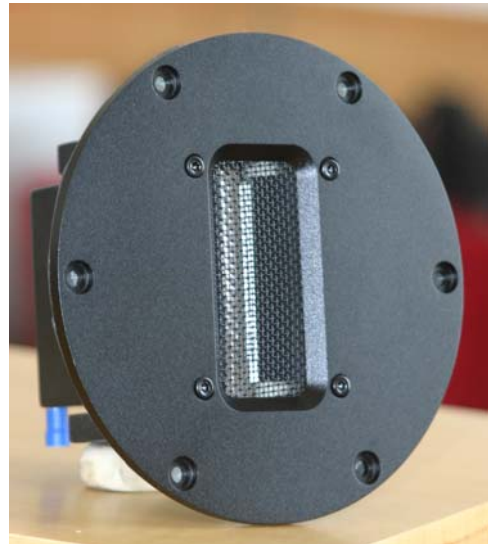


Alternate faceplate: 106mm X 106mm X 6mmT




Frequency Response

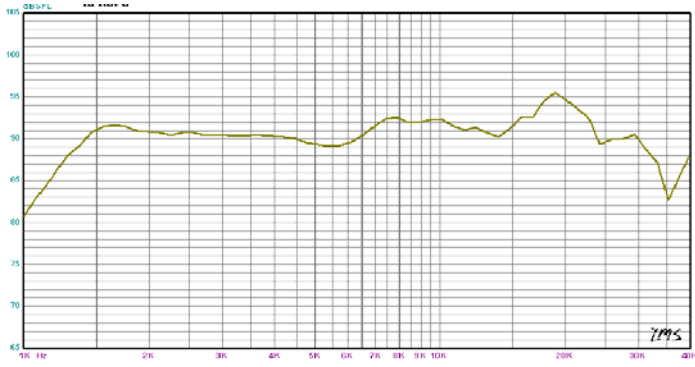


Impedance

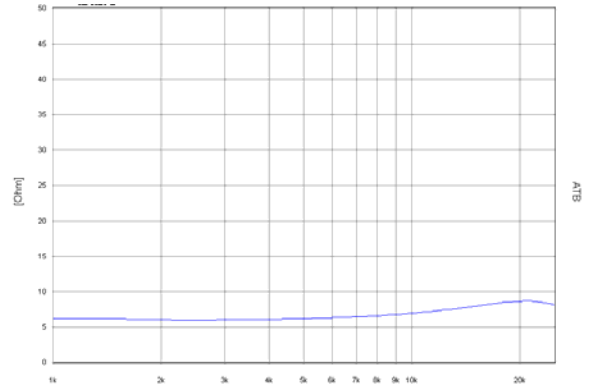

Distortion

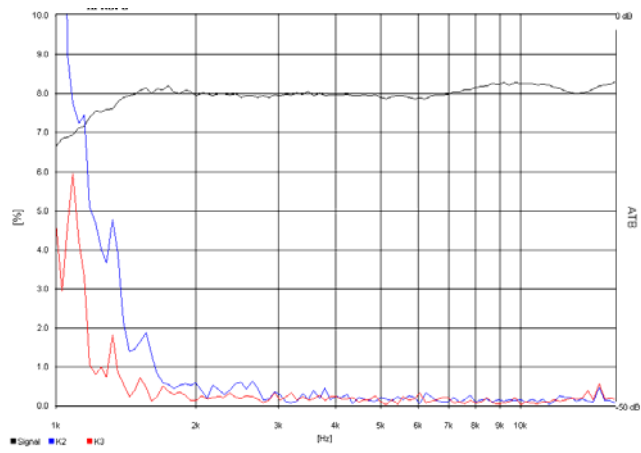

Impulse

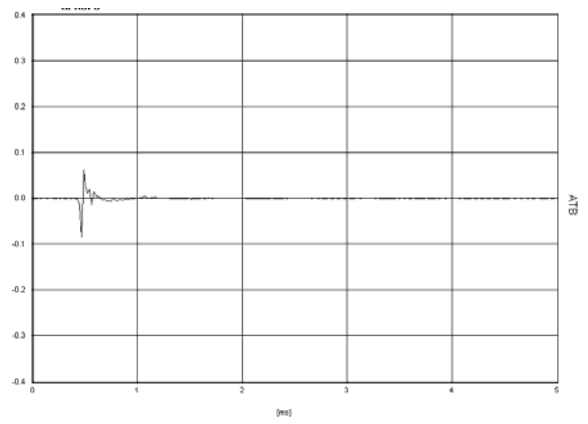

Waterfall

